

August 27, 2009

**Open system effects on slow light and electromagnetically induced transparency**Jonas Tidström,<sup>1</sup> Marie Ericsson,<sup>2</sup> Erik Sjöqvist,<sup>2</sup> and L. Mauritz Andersson<sup>1</sup><sup>1</sup>*Department of Microelectronics and Applied Physics,  
Royal Institute of Technology (KTH), Electrum 229, SE-164 40 Kista, Sweden\**  
<sup>2</sup>*Department of Quantum Chemistry, Box 518, SE-751 20 Uppsala, Sweden*

The interaction of a three-level  $\Lambda$ -system with a Markovian environment is analyzed. A coherence vector formalism is used and a vector form of the Lindblad equation is derived. Depolarization, dephasing, and different amplitude damping channels acting on the subspace of the ground states of the  $\Lambda$ -system are investigated. Analytic expressions of the concomitant optical susceptibility are given in the limit of a small probe field and a strong control field, and we analyze how the different channels influence the optical response. For a given group velocity, the absorption depends non-trivially on the type of open system interaction and even gain can be obtained.

PACS numbers: 03.65.Yz, 42.50.Gy, 42.65.An

**I. INTRODUCTION**

A medium that is opaque to radiation on one of the transitions of a  $\Lambda$ -system can be made transparent by addressing a laser field on the second transition, a phenomenon known as electromagnetically induced transparency (EIT) [1, 2]. Associated with this transparency is an extremely small and dynamically controllable group velocity [3]. The pulse can be brought to a complete stop and stored as an atomic coherence. Most impressive with respect to storage time, is perhaps the storage of a light pulse in a solid for a period greater than one second [4]. The process can be reversed, and the light pulse released with the original pulse information intact [5], making the EIT a strong candidate for a quantum memory [6]. Beside applications in quantum information processing, the narrow spectral feature of EIT is an important tool in spectroscopy [7], high precision magnetic sensors [8], and atomic clocks [9, 10].

The dark state of the  $\Lambda$ -system is responsible for the above coherence properties [11]. Open system effects suppress the dark state of the system and thus sets the ultimate limit on the storage time of light, the residual absorption, and the spectral resolution of the transparency. There are tricks that one can play in order to increase the efficiency of this coherence effect. In, for example, Ref. [4] the effective decoherence rate was decreased by a method called quantum bang-bang dynamic control, inspired by refocusing techniques in nuclear magnetic resonance [12]. Furthermore, there is a trade-off between the delay of a pulse and the bandwidth [13]. In order to increase the bandwidth, spatially dispersed light beams in non-isotropic media can be used [14].

An electromagnetic field interacting with matter gives rise to a matter polarization. The linear part of the polarization field  $P = P(E)$  can be written in terms of the electrical susceptibility  $\chi = P/(E\epsilon_0)$ , with  $\epsilon_0$  the electrical permittivity in free space. The real and imaginary parts of the susceptibility, describe the phase velocity of the electrical field and the absorption or gain of the field, respectively. The macroscopic polarization field of an isotropic medium consisting of  $N$  atoms per unit volume is

$$\mathbf{P} \equiv \langle \hat{\mathbf{P}} \rangle = N \langle \hat{\mathbf{p}} \rangle = N \text{Tr}[\hat{\rho} \hat{\boldsymbol{\mu}}], \quad (1)$$

where  $\hat{\rho}$  is the atomic density operator and  $\hat{\boldsymbol{\mu}} = e \hat{\mathbf{r}}$  is the dipole operator with electric charge  $e$  and position  $\hat{\mathbf{r}}$ . Therefore, if  $\hat{\rho}$  is known as a function of the optical field, the optical response is too, as it is given by the coherences of  $\hat{\rho}$ .

In this paper, we investigate various types of interactions between the  $\Lambda$ -system and a Markovian environment and how they influence the optical response, i.e., the susceptibility of the medium, via calculation of the density operator  $\hat{\rho}$  in the asymptotic time limit. We use the Gell-Mann matrices to reformulate the Lindblad-Kossakowski master equation [15, 16] employing a coherence vector formalism [17]. A convenient vector form of the master equation is found, in which the dynamics is rephrased as a vector equation using  $\text{SU}(3)$  vector products. The coherence matrix representation of the vector master equation is given as an inhomogeneous linear matrix differential equation, to which the considered asymptotic state solutions are independent of the initial state.

---

\*Electronic address: tidstrom@kth.se

The linear optical response of a weak probe field interacting with the  $\Lambda$ -system can be determined analytically and an explicit form of the susceptibilities due to the dephasing, depolarization, and three different amplitude damping channels acting on the ground states of the  $\Lambda$ -system are given. Effects due to open system interactions are expected to be relevant in many experimental instances.

The outline of the paper is as follows. Section II contains a general theory for a Markovian dynamics in a three-level system using coherence vector formalism. In Sec. III, we apply this framework to our specific  $\Lambda$ -system, undergoing an open system dynamics corresponding to the dephasing, depolarization, and amplitude damping channels. We are interested in the asymptotic solutions of the system, i.e., when  $t \rightarrow \infty$ . From these it is possible to deduce the susceptibility of the system and open system effects are explicit. The paper ends with the conclusions.

## II. OPEN THREE-LEVEL SYSTEM

We commence by studying a general three-level quantum system and the effects due to the interaction with an environment. For a Markovian environment, the density operator  $\hat{\rho}$  may be assumed to satisfy the master equation

$$\partial_t \hat{\rho} = \frac{1}{i\hbar} [\hat{H}, \hat{\rho}] + \hat{\mathcal{L}}(\hat{\rho}), \quad (2)$$

where  $\hat{H}$  is the Hamiltonian operator. The Liouville superoperator  $\hat{\mathcal{L}}$  is linear, describes the coupling with the environment, and can be written on Lindblad form [15]

$$\hat{\mathcal{L}}(\hat{\rho}) = \sum_{\mathbf{k}} (\hat{\gamma}_{\mathbf{k}} \hat{\rho} \hat{\gamma}_{\mathbf{k}}^\dagger - \frac{1}{2} \hat{\gamma}_{\mathbf{k}}^\dagger \hat{\gamma}_{\mathbf{k}} \hat{\rho} - \frac{1}{2} \hat{\rho} \hat{\gamma}_{\mathbf{k}}^\dagger \hat{\gamma}_{\mathbf{k}}), \quad (3)$$

where  $\hat{\gamma}_{\mathbf{k}}$  are Lindblad operators, and the subscript  $\mathbf{k}$  denotes the open system channels.

The coherence vector representation consists of a real-valued vector  $\mathbf{x}$  (the ‘coherence vector’) and the generators of the appropriate algebra [18]. For a three-level system, we express the dynamics with respect to some Hilbert space basis in terms of the  $SU(3)$  matrix generators, i.e., the traceless Gell-Mann matrices

$$\begin{aligned} \lambda_1 &= \begin{pmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}, & \lambda_2 &= \begin{pmatrix} 0 & -i & 0 \\ i & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}, \\ \lambda_3 &= \begin{pmatrix} 1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 0 \end{pmatrix}, & \lambda_4 &= \begin{pmatrix} 0 & 0 & 1 \\ 0 & 0 & 0 \\ 1 & 0 & 0 \end{pmatrix}, \\ \lambda_5 &= \begin{pmatrix} 0 & 0 & -i \\ 0 & 0 & 0 \\ i & 0 & 0 \end{pmatrix}, & \lambda_6 &= \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & 1 \\ 0 & 1 & 0 \end{pmatrix}, \\ \lambda_7 &= \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & -i \\ 0 & i & 0 \end{pmatrix}, & \lambda_8 &= \frac{1}{\sqrt{3}} \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & -2 \end{pmatrix}. \end{aligned} \quad (4)$$

These satisfy the fundamental relations

$$\begin{aligned} \text{Tr}[\lambda_r \lambda_s] &= 2\delta_{rs}, \\ [\lambda_r, \lambda_s] &= 2if_{rst}\lambda_t, \\ \{\lambda_r, \lambda_s\} &= \frac{4}{3}\delta_{rs} + 2d_{rst}\lambda_t, \end{aligned} \quad (5)$$

where  $f$  and  $d$  are real-valued structure constants of the  $SU(3)$  algebra, being totally antisymmetric and totally symmetric, respectively, under permutation of the indices  $r$ ,  $s$ , and  $t$  [19]. The values of the structure constants are tabulated in, e.g., Ref. [20]. The number  $1/3$  in Eq. (5) reflects the dimensionality of the quantum system, for a general  $N$  level system this should be replaced with  $1/N$ . The density matrix  $\rho$  and Hamiltonian matrix  $H$  can be written in terms of the  $\lambda$ ’s as

$$\begin{aligned} \rho &= \frac{1}{3}\mathbb{1} + \mathbf{x} \cdot \boldsymbol{\lambda}, \\ H &= \hbar\omega_0\mathbb{1} + \hbar\boldsymbol{\omega} \cdot \boldsymbol{\lambda}. \end{aligned} \quad (6)$$

Here,  $\mathbb{1}$  is the  $3 \times 3$  identity matrix, we have introduced eight-component vectors  $\boldsymbol{\omega}$  and  $\boldsymbol{\lambda}$  associated with the Hamiltonian and Gell-Mann matrices, respectively, and we have used the standard scalar product ' $\cdot$ '. The length of the coherence vector  $\boldsymbol{x}$  is  $0 \leq |\boldsymbol{x}|^2 \leq 1/3$ , with  $|\boldsymbol{x}|^2 = 1/3$  for pure states and  $|\boldsymbol{x}|^2 = 0$  for completely mixed states. By inserting Eq. (6) into Eq. (2) we obtain

$$\dot{\boldsymbol{x}} \cdot \boldsymbol{\lambda} = \frac{1}{i}[\boldsymbol{\omega} \cdot \boldsymbol{\lambda}, \boldsymbol{x} \cdot \boldsymbol{\lambda}] + \frac{1}{3}\mathcal{L}(\mathbb{1}) + \mathcal{L}(\boldsymbol{x} \cdot \boldsymbol{\lambda}), \quad (7)$$

i.e., the dynamics reformulated in terms of Gell-Mann matrices. Any physical process giving rise to a change in the length of the coherence vector can be split into a Hamiltonian contribution and a traceless Lindblad operator contribution to the Liouville equation. Thus, the matrix form of the Lindblad operators  $\hat{\gamma}_k$  is written as  $\hat{\gamma}_k \doteq g_0 \mathbb{1} + \boldsymbol{g}_k \cdot \boldsymbol{\lambda}$ , where the symbol ' $\doteq$ ' stands for 'represented by'. In this paper we will not consider the contribution from  $g_0$ , but focus on the 'Lindblad vectors'  $\boldsymbol{g}_k$  [21].

Our goal is to put Eq. (7) on  $\boldsymbol{\lambda}$ -independent form. To this end, we introduce the following vector products

$$\begin{aligned} \boldsymbol{\alpha} \wedge \boldsymbol{\beta} &= f_{rst} \mathbf{e}_r \alpha_s \beta_t, \\ \boldsymbol{\alpha} \star \boldsymbol{\beta} &= d_{rst} \mathbf{e}_r \alpha_s \beta_t \end{aligned} \quad (8)$$

where  $\boldsymbol{\alpha} = \alpha_q \mathbf{e}_q$  and  $\boldsymbol{\beta} = \beta_q \mathbf{e}_q$  are arbitrary complex-valued vectors,  $\{\mathbf{e}_i\}_{i=1}^8$  is a real orthonormal basis of  $\mathbb{R}^8$ , and we have used Einstein's summation convention (repeated indices are summed). The wedge product ' $\wedge$ ' is a higher-dimensional vector product analog to the cross-product in three-dimensional space. The star product ' $\star$ ' is a vector product that has no counterpart in three dimensions.

Equipped with these tools we may now rewrite each term in the right-hand side of Eq. (7). First, the Hamiltonian contribution reads

$$\frac{1}{i}[\boldsymbol{\omega} \cdot \boldsymbol{\lambda}, \boldsymbol{x} \cdot \boldsymbol{\lambda}] = 2(\boldsymbol{\omega} \wedge \boldsymbol{x}) \cdot \boldsymbol{\lambda}. \quad (9)$$

Secondly, the middle term of Eq. (7) is readily evaluated as

$$\mathcal{L}(\mathbb{1}) = \sum_k 2i(\boldsymbol{g}_k \wedge \boldsymbol{g}_k^*) \cdot \boldsymbol{\lambda}, \quad (10)$$

where each term  $\boldsymbol{g}_k \wedge \boldsymbol{g}_k^*$  is purely imaginary, and hence  $\mathcal{L}(\mathbb{1})$  is real as required. Note that, for Hermitian  $\hat{\gamma}_k$  the corresponding vector  $\boldsymbol{g}_k$  is real and thus  $\boldsymbol{g}_k \wedge \boldsymbol{g}_k^* = 0$ . Finally, by using the symmetries of the structure constants the last term of Eq. (7) takes the form

$$\begin{aligned} \mathcal{L}(\boldsymbol{x} \cdot \boldsymbol{\lambda}) &= \sum_k \left\{ \left[ \boldsymbol{g}_k^* \wedge (\boldsymbol{g}_k \wedge \boldsymbol{x}) + \boldsymbol{g}_k \wedge (\boldsymbol{g}_k^* \wedge \boldsymbol{x}) \right] \right. \\ &\quad \left. + \frac{i}{4} \left[ (\boldsymbol{g}_k \wedge \boldsymbol{x}) \star \boldsymbol{g}_k^* + \boldsymbol{g}_k \star (\boldsymbol{x} \wedge \boldsymbol{g}_k^*) - 2(\boldsymbol{g}_k^* \wedge \boldsymbol{g}_k) \star \boldsymbol{x} + 3(\boldsymbol{g}_k \star \boldsymbol{x}) \wedge \boldsymbol{g}_k^* + 3\boldsymbol{g}_k \wedge (\boldsymbol{x} \star \boldsymbol{g}_k^*) \right] \right\} \cdot \boldsymbol{\lambda}. \end{aligned} \quad (11)$$

By identifying terms, we arrive at the full Lindblad master equation in vector form

$$\begin{aligned} \dot{\boldsymbol{x}} &= 2\boldsymbol{\omega} \wedge \boldsymbol{x} + \sum_k \left\{ \frac{2i}{3} \boldsymbol{g}_k \wedge \boldsymbol{g}_k^* + \left[ \boldsymbol{g}_k^* \wedge (\boldsymbol{g}_k \wedge \boldsymbol{x}) + \boldsymbol{g}_k \wedge (\boldsymbol{g}_k^* \wedge \boldsymbol{x}) \right] \right. \\ &\quad \left. + \frac{i}{4} \left[ (\boldsymbol{g}_k \wedge \boldsymbol{x}) \star \boldsymbol{g}_k^* + \boldsymbol{g}_k \star (\boldsymbol{x} \wedge \boldsymbol{g}_k^*) - 2(\boldsymbol{g}_k^* \wedge \boldsymbol{g}_k) \star \boldsymbol{x} + 3(\boldsymbol{g}_k \star \boldsymbol{x}) \wedge \boldsymbol{g}_k^* + 3\boldsymbol{g}_k \wedge (\boldsymbol{x} \star \boldsymbol{g}_k^*) \right] \right\}. \end{aligned} \quad (12)$$

This equation describes the dynamics of a quantum system that interacts with a Markovian environment. It should be emphasized that since the Gell-Mann matrices have been eliminated, this expression is valid for any  $N$ -dimensional quantum system provided the  $SU(N)$  structure constants are being used in the definition of the vector products  $\wedge$  and  $\star$ .

Let us now proceed by representing Eq. (12) in a coherence matrix form. We write  $\boldsymbol{x} = x_i \mathbf{e}_i$ ,  $\boldsymbol{\omega} = \omega_i \mathbf{e}_i$ , and  $\boldsymbol{\lambda} = \lambda_i \mathbf{e}_i$ , yielding

$$\begin{aligned} 2\boldsymbol{\omega} \wedge \boldsymbol{x} &= M^{(0)} \boldsymbol{x} : M_{rt}^{(0)} = 2f_{rst} \omega_s, \\ \boldsymbol{g}_k^* \wedge (\boldsymbol{g}_k \wedge \boldsymbol{x}) + \boldsymbol{g}_k \wedge (\boldsymbol{g}_k^* \wedge \boldsymbol{x}) &= G_k^{(+)} \boldsymbol{x} : G_{k,rt}^{(+)} = f_{rsm} f_{mvt} C_{k,sv}^{(+)}, \\ \frac{i}{4} \left[ (\boldsymbol{g}_k \wedge \boldsymbol{x}) \star \boldsymbol{g}_k^* + \boldsymbol{g}_k \star (\boldsymbol{x} \wedge \boldsymbol{g}_k^*) - 2(\boldsymbol{g}_k^* \wedge \boldsymbol{g}_k) \star \boldsymbol{x} + \right. \\ &\quad \left. + 3(\boldsymbol{g}_k \star \boldsymbol{x}) \wedge \boldsymbol{g}_k^* + 3\boldsymbol{g}_k \wedge (\boldsymbol{x} \star \boldsymbol{g}_k^*) \right] = G_k^{(-)} \boldsymbol{x} : G_{k,rt}^{(-)} = \frac{i}{4} (d_{rms} f_{mvt} - d_{rmt} f_{msv} + 3f_{rms} d_{mvt}) C_{k,sv}^{(-)}, \\ \frac{2i}{3} \boldsymbol{g}_k \wedge \boldsymbol{g}_k^* &= \boldsymbol{b}_k : \quad b_{k,r} = f_{rvs} C_{k,sv}^{(-)} \end{aligned} \quad (13)$$




FIG. 1: The  $\Lambda$ -system. The field on the  $a$ - $b$  transition is a weak probe field  $\Omega_b$ , and the field on the  $a$ - $c$  transition the control field  $\Omega_c$ . The upper level is broadened by the finite lifetime  $1/\gamma$ .

with

$$C_{k,sv}^{(\pm)} = (g_{k,s}^* g_{k,v} \pm g_{k,s} g_{k,v}^*), \quad (14)$$

being symmetric (+) and antisymmetric (−) in the indices  $s$  and  $v$ . Furthermore, while  $C_{k,sv}^{(+)}$  is real-valued,  $C_{k,sv}^{(-)}$  is purely imaginary and thus vanishes for real-valued  $\mathbf{g}_k$ . The antisymmetric matrix  $M^{(0)}$  corresponds to the Hamiltonian of the system. The second row of Eq. (13) defines the real and symmetric matrix  $G_k^{(+)}$ . The matrix  $G_k^{(-)}$  and also the vector  $\mathbf{b}_k$  vanish for real-valued  $\mathbf{g}_k$ , as they both are proportional to the matrix  $C_k^{(-)}$ . The matrix  $G_{k,rt}^{(-)}$  is also real-valued but has no obvious symmetry in the indices  $r$  and  $t$ .

The complete dynamics of the system, including open system effects, can be written as an inhomogeneous matrix differential equation [22]

$$\dot{\mathbf{x}} = M\mathbf{x} + \mathbf{b}, \quad (15)$$

with the evolution matrix

$$M = M^{(0)} + \sum_k (G_k^{(+)} + G_k^{(-)}) \quad (16)$$

and vector

$$\mathbf{b} = \sum_k \mathbf{b}_k. \quad (17)$$

For time-independent and invertible  $M$  [23], the general solution of Eq. (15) takes the form [17, 18]

$$\mathbf{x} = e^{Mt} \mathbf{x}_0 - M^{-1} \mathbf{b}, \quad (18)$$

where  $\mathbf{x}_0 = \mathbf{x}(0) + M^{-1} \mathbf{b}$ ,  $\mathbf{x}(0)$  being the initial coherence vector. Note that the evaluation of the exponential of  $M$  is non-trivial, since  $M$  is not diagonalizable in general.

### III. OPEN $\Lambda$ -SYSTEM

#### A. Dynamical quantities

The  $\Lambda$ -system consists of two ground state levels coupled to an excited state via electromagnetic fields, as shown in Fig. 1. The corresponding Hamiltonian is given by  $\hat{H}(t) = \hat{H}_0 - \hat{\boldsymbol{\mu}} \cdot \mathbf{E}(t)$ , where  $\hat{H}_0$  is the Hamiltonian of the bare atom,  $\hat{\boldsymbol{\mu}}$  is the electric dipole operator, and  $\mathbf{E}(t)$  is an oscillating electric field. Furthermore, let  $\mathcal{E}_i$  be the energy eigenvalues of  $\hat{H}_0$  corresponding to the bare eigenstates  $|i\rangle$ ,  $i = a, b, c$ . In a frame rotating with the external field, the Hamiltonian operator reads

$$\hat{H} = \hbar \delta_b |b\rangle\langle b| + \hbar \delta_c |c\rangle\langle c| - \hbar \Omega_b |a\rangle\langle b| - \hbar \Omega_c |a\rangle\langle c| + h.c., \quad (19)$$

where we have used the rotating wave approximation and we have defined the complex Rabi frequencies in terms of the electric field  $\mathbf{E}$  in the rotating frame as  $\Omega_i = \langle a | \hat{\boldsymbol{\mu}} | i \rangle \cdot \mathbf{E} / (2\hbar)$  and detunings  $\delta_i = \omega_i - (\mathcal{E}_a - \mathcal{E}_i) / \hbar$ , where  $\omega_i$  are the frequencies of the field. Defining the Gell-Mann matrices in terms of the ordered basis  $\{|b\rangle, |c\rangle, |a\rangle\}$ , the parameters of the Hamiltonian matrix in Eq. (6) are

$$\begin{aligned}\omega_0 &= \frac{1}{3} \text{Tr}[H] = \frac{2}{3} \Delta, \\ \boldsymbol{\omega} &= \frac{1}{2} \text{Tr}[H \lambda_i] \mathbf{e}_i = \delta \mathbf{e}_3 - |\Omega_b| \cos \phi_b \mathbf{e}_4 - |\Omega_b| \sin \phi_b \mathbf{e}_5 - |\Omega_c| \cos \phi_c \mathbf{e}_6 - |\Omega_c| \sin \phi_c \mathbf{e}_7 - \frac{1}{\sqrt{3}} \Delta \mathbf{e}_8,\end{aligned}\quad (20)$$

where  $\Omega_i = |\Omega_i| \exp(i\phi_i)$  and we have defined the two-photon detuning  $\delta = (\delta_b - \delta_c)/2$  as well as the mean detuning  $\Delta = (\delta_b + \delta_c)/2$ . The factor  $\frac{1}{2}$  in the definition of  $\delta$  and  $|\Omega_i|$  has been introduced for notational convenience.

We now specify the Lindblad operators that describe the different forms of open system dynamics. First, spontaneous emission, or the decay channel, is always present in the  $\Lambda$ -system. It corresponds to the amplitude damping of the excited energy state  $|a\rangle$  to either of the two ground states  $|b\rangle$  or  $|c\rangle$  with rates  $\gamma_b$  and  $\gamma_c$ , respectively. The corresponding Lindblad operators and their matrix representation read

$$\begin{aligned}\hat{\gamma}_b &= \sqrt{\gamma_b} |b\rangle \langle a| \doteq \frac{1}{2} \sqrt{\gamma_b} (\lambda_4 + i\lambda_5), \\ \hat{\gamma}_c &= \sqrt{\gamma_c} |c\rangle \langle a| \doteq \frac{1}{2} \sqrt{\gamma_c} (\lambda_6 + i\lambda_7),\end{aligned}\quad (21)$$

and they define the natural line width  $\gamma \equiv \gamma_b + \gamma_c$  indicated in Fig. 1. The subscripts  $b$  and  $c$  indicate the final quantum state of the atom after interaction with the environment through the decay channel. The Lindblad vectors are

$$\begin{aligned}\mathbf{g}_b &= \frac{1}{2} \sqrt{\gamma_b} (\mathbf{e}_4 + i\mathbf{e}_5), \\ \mathbf{g}_c &= \frac{1}{2} \sqrt{\gamma_c} (\mathbf{e}_6 + i\mathbf{e}_7).\end{aligned}\quad (22)$$

These vectors are complex-valued and therefore the matrix  $C^{(-)}$  in Eq. (14) is non-vanishing and, accordingly, the decay channel contributes to the dynamics, Eq. (15), with a non-zero  $\mathbf{b}$  vector.

The dark state of the  $\Lambda$ -system is

$$|d\rangle = \frac{1}{\sqrt{|\Omega_b|^2 + |\Omega_c|^2}} (\Omega_c^* |b\rangle - \Omega_b^* |c\rangle). \quad (23)$$

This is an eigenstate of the Hamiltonian, it is also unaffected by the decay channels defined by Eq. (21). The additional open system effects that we are primarily interested in are the ones that act on the two-dimensional subspace  $V_{bc} = \{|b\rangle, |c\rangle\}$ , since these could potentially destroy the dark state and its associated phenomena. Furthermore, we consider the limit of a weak probe field and a strong control field, i.e.,  $|\Omega_b| \ll |\Omega_c|$ , hence the dark state will be close to  $|b\rangle$ .

For a general two-level system a set of generic open system channels is given by the depolarization, dephasing, and amplitude damping channels [24]. Here, we examine these channels acting on  $V_{bc}$ . Depolarization and dephasing are particular combinations of the Hermitian Lindblad operators

$$\begin{aligned}\hat{\gamma}_x &= \sqrt{\eta_x} (|b\rangle \langle c| + |c\rangle \langle b|) \doteq \sqrt{\eta_x} \lambda_1, \\ \hat{\gamma}_y &= \sqrt{\eta_y} (-i|b\rangle \langle c| + i|c\rangle \langle b|) \doteq \sqrt{\eta_y} \lambda_2, \\ \hat{\gamma}_z &= \sqrt{\eta_z} (|b\rangle \langle b| - |c\rangle \langle c|) \doteq \sqrt{\eta_z} \lambda_3,\end{aligned}\quad (24)$$

where the symbol  $\eta_i$  is used to denote rates of the various channels acting on  $V_{bc}$ . The corresponding Lindblad vectors are real and given by

$$\begin{aligned}\mathbf{g}_x &= \sqrt{\eta_x} \mathbf{e}_1, \\ \mathbf{g}_y &= \sqrt{\eta_y} \mathbf{e}_2, \\ \mathbf{g}_z &= \sqrt{\eta_z} \mathbf{e}_3.\end{aligned}\quad (25)$$

The depolarization channel is isotropic, i.e., corresponds to  $\eta_x = \eta_y = \eta_z \equiv \eta/3$ . The dephasing channel, on the other hand, is anisotropic and corresponds to  $\eta_x = \eta_y = 0, \eta_z \neq 0$ . Neither depolarization nor dephasing contribute to the  $\mathbf{b}$  vector, since the matrix  $C^{(-)}$  vanishes.

In the limit of a small probe field, the dark state is close to  $|b\rangle$ , and we may expect a certain asymmetry between amplitude damping in the two directions  $b \leftarrow c$  and  $c \leftarrow b$ . To take this into account, we choose to study combinations of the two amplitude damping channels

$$\begin{aligned}\hat{\gamma}_{bc} &= \sqrt{\eta_{bc}}|b\rangle\langle c| \doteq \frac{1}{2}\sqrt{\eta_{bc}}(\lambda_1 + i\lambda_2), \\ \hat{\gamma}_{cb} &= \sqrt{\eta_{cb}}|c\rangle\langle b| \doteq \frac{1}{2}\sqrt{\eta_{cb}}(\lambda_1 - i\lambda_2),\end{aligned}\tag{26}$$

where  $\hat{\gamma}_{bc}$  flips  $|c\rangle$  to  $|b\rangle$  at a rate  $\eta_{cb}$  and vice versa for  $\hat{\gamma}_{cb}$ . The corresponding Lindblad vectors read

$$\begin{aligned}\mathbf{g}_{bc} &= \frac{1}{2}\sqrt{\eta_{bc}}(\mathbf{e}_1 + i\mathbf{e}_2), \\ \mathbf{g}_{cb} &= \frac{1}{2}\sqrt{\eta_{cb}}(\mathbf{e}_1 - i\mathbf{e}_2),\end{aligned}\tag{27}$$

which are complex-valued and may therefore contribute to the  $\mathbf{b}$  vector.

The evolution matrix  $M$  and the vector  $\mathbf{b}$  contain contributions of three different types:

- (i) Decay of the excited state is considered to be part of the basic setting of the system, viz., the decay channel is always present in the analysis from this point and onwards. The corresponding  $M$  matrix has the form  $M_{\text{decay}} = G_b^{(+)} + G_b^{(-)} + G_c^{(+)} + G_c^{(-)}$  and the  $\mathbf{b}_{\text{decay}}$  vector is non-zero since the Lindblad vectors of the decay channel are complex. As we will see below,  $\mathbf{b}_{\text{decay}} = \mathbf{b}_b + \mathbf{b}_c$  points in a fixed direction in  $\mathbb{R}^8$ .
- (ii) Dephasing and depolarization in  $V_{bc}$  corresponding to real-valued Lindblad vectors  $\mathbf{g}_k$ , for which  $\mathbf{b}_k$  vanishes identically. In this case the evolution matrix is given by  $M_k = G_k^{(+)}$ .
- (iii) Amplitude damping in  $V_{bc}$  corresponding to complex-valued  $\mathbf{g}_k$ . In this case, one has to evaluate  $G_k^{(+)}$ ,  $G_k^{(-)}$ , and  $\mathbf{b}_k$ .

The complete dynamics of the system is described by the evolution matrix  $M$  and vector  $\mathbf{b}$ , where we are summing over all channels, as in Eqs. (16,17). These quantities take a simple form by applying the following similarity transformation

$$T = \mathbf{e}_1\mathbf{e}_1^T + \mathbf{e}_2\mathbf{e}_2^T + \mathbf{e}_3\mathbf{e}_3^T + \mathbf{e}_5\mathbf{e}_4^T + \mathbf{e}_6\mathbf{e}_5^T + \mathbf{e}_7\mathbf{e}_6^T + \mathbf{e}_8\mathbf{e}_7^T + \mathbf{e}_4\mathbf{e}_8^T.\tag{28}$$

The transformed evolution matrix  $M'$  is given by

$$M' = TMT^{-1} = \begin{pmatrix} A & C \\ -C^T & B \end{pmatrix},\tag{29}$$

the submatrices of which are given by

$$\begin{aligned}A &= \begin{pmatrix} -\text{Re}(\Gamma) & -\text{Im}(\Gamma) & 0 & 0 \\ \text{Im}(\Gamma) & -\text{Re}(\Gamma) & 0 & 0 \\ 0 & 0 & -\eta_+ & \eta_-/\sqrt{3} \\ 0 & 0 & 0 & -2\gamma \end{pmatrix}, \\ B &= \begin{pmatrix} -\text{Re}(\Gamma_b) & -\text{Im}(\Gamma_b) & 0 & 0 \\ \text{Im}(\Gamma_b) & -\text{Re}(\Gamma_b) & 0 & 0 \\ 0 & 0 & -\text{Re}(\Gamma_c) & -\text{Im}(\Gamma_c) \\ 0 & 0 & \text{Im}(\Gamma_c) & -\text{Re}(\Gamma_c) \end{pmatrix}, \\ C &= \begin{pmatrix} |\Omega_c|\sin\phi_c & -|\Omega_c|\cos\phi_c & |\Omega_b|\sin\phi_b & -|\Omega_b|\cos\phi_b \\ |\Omega_c|\cos\phi_c & |\Omega_c|\sin\phi_c & -|\Omega_b|\cos\phi_b & -|\Omega_b|\sin\phi_b \\ |\Omega_b|\sin\phi_b & -|\Omega_b|\cos\phi_b & -|\Omega_c|\sin\phi_c & |\Omega_c|\cos\phi_c \\ \sqrt{3}|\Omega_b|\sin\phi_b & -\sqrt{3}|\Omega_b|\cos\phi_b & \sqrt{3}|\Omega_c|\sin\phi_c & -\sqrt{3}|\Omega_c|\cos\phi_c \end{pmatrix}.\end{aligned}\tag{30}$$

Here, we have introduced the parameters

$$\begin{aligned}\eta_- &= (\eta_{bc} - \eta_{cb})/2, \\ \eta_+ &= \eta_{bc} + \eta_{cb} + 4\eta, \\ \Gamma_b &= i\delta_b + \gamma + (3\eta + \eta_{cb} + \eta_z)/2, \\ \Gamma_c &= i\delta_c + \gamma + (3\eta + \eta_{bc} + \eta_z)/2, \\ \Gamma &= 2i\delta + (\eta_{bc} + \eta_{cb})/2 + 4\eta + 2\eta_z.\end{aligned}\tag{31}$$

The Hamiltonian contribution  $M^{(0) \prime}$  in the antisymmetric part of  $M'$  and corresponds to an infinitesimal rotation of the coherence vector in  $\mathbb{R}^8$ . The diagonal elements of  $M'$  are real and negative, and contain the open system rates. The only channel rate that is located off the diagonal of the evolution matrix is  $\eta_-/\sqrt{3}$ , in submatrix  $A$ , which originates from the two amplitude damping rates in  $V_{bc}$  having different channel rates.

By using Eqs. (13) and (28), the transformed vector

$$\mathbf{b}' = T\mathbf{b}, \quad (32)$$

takes the form

$$\mathbf{b}' = \frac{2\eta_-}{3}\mathbf{e}_3 + \frac{\gamma}{\sqrt{3}}\mathbf{e}_4. \quad (33)$$

The first contribution to  $\mathbf{b}'$  stems from the two amplitude damping channels and vanishes only if the two rates  $\eta_{bc}$  and  $\eta_{cb}$  are equal. The second term on the right-hand side of Eq. (33) corresponds to the decay of the excited state  $|a\rangle$ . Note that the dynamics depends on the sum of  $\gamma_b$  and  $\gamma_c$ , not of the relative rates.

### B. Jordan form analysis

The evaluation of the exponential of  $M$  is non-trivial, since  $M$  is not diagonalizable in general. To deal with this fact one may resort to the Jordan normal form of  $M$ , i.e.,  $M = SJS^{-1}$ , where  $J$  has non-zero entries only on the diagonal and the super-diagonal, and  $S$  is an invertible matrix. Expanding the exponent in Eq. (18), we can write the general solution as

$$\mathbf{x} = Se^{Jt}S^{-1}\mathbf{x}_0 - M^{-1}\mathbf{b}. \quad (34)$$

The spectrum of  $M$  is  $\{s_i\}_{i=1}^8$ ,  $s_i \in \mathbb{C}$ , where the real part of the eigenvalues originates from  $\hat{\mathcal{L}}$  and must be zero or negative in order to preserve positivity of the density operator.

We now look at the eigenvectors of  $M$ . For our  $\Lambda$ -system these will in general be non-orthogonal. Higher-dimensional Jordan Blocks occur provided  $M$  has linearly dependent eigenvectors corresponding to degenerate eigenvalues. However, it is a rare situation to have two or more linearly dependent eigenvectors and in all the cases we investigate in this paper, we only detect one-dimensional Jordan blocks.

We now ask what happens for different open system effects corresponding to one-dimensional Jordan blocks. We focus on the case where we have  $s_{i \in I} = 0$ ,  $I$  being an index set, and  $\text{Re}(s_{i \notin I}) < 0$ . In the  $t \rightarrow \infty$  limit, the matrix  $e^{Jt}$  tends to the matrix  $P'$ , which projects onto the subspace corresponding to  $I$ . Thus, in this limit,  $e^{Mt} = Se^{Jt}S^{-1}$  tends to the projector  $SP'S^{-1}$  and the asymptotic coherence vector  $\mathbf{x}^{(\infty)}$  depends on the initial coherence vector  $\mathbf{x}_0$  according to

$$\mathbf{x}^{(\infty)} = P\mathbf{x}_0 - M^{-1}\mathbf{b}. \quad (35)$$

On the other hand, if  $I$  is the empty set, i.e.,  $\text{Re}(s_i) < 0 \forall i$ , we have  $e^{Mt} = Se^{Jt}S^{-1} \rightarrow 0$  when  $t \rightarrow \infty$ . In this case, the asymptotic state is determined by

$$\mathbf{x}^{(\infty)} = -M^{-1}\mathbf{b}, \quad (36)$$

thus being independent of  $\mathbf{x}_0$ . In this paper  $I$  is the empty set, we therefore proceed to analyze the latter asymptotic state in the next section.

### C. Susceptibility for the asymptotic state

Let us now examine the susceptibility for a small probe field that interacts with a medium consisting of a collection of  $\Lambda$ -systems that in turn are affected by the open system channels considered in Sec. III A. The susceptibility of a medium is related to the asymptotic state of the atomic coherence  $\rho_{ab}^{(\infty)} = x_4^{(\infty)} + ix_5^{(\infty)}$ , which can be calculated by using Eqs. (29), (30), (32), and (36), see., e.g., Ref. [25]. Explicitly,

$$\chi = \kappa \rho_{ab}^{(\infty)} / \Omega_b, \quad (37)$$

with  $\kappa = N|\langle a|\hat{\boldsymbol{\mu}}|b\rangle|^2/(2\epsilon_0\hbar)$ , and we recall that the Rabi frequency is defined in a non-standard way with an extra factor of 2 for notational convenience:  $\Omega_i = \langle a|\hat{\boldsymbol{\mu}}|i\rangle \cdot \mathbf{E}/(2\hbar)$ ,  $i = b, c$ . The susceptibility defined in Eq. (37) is correct

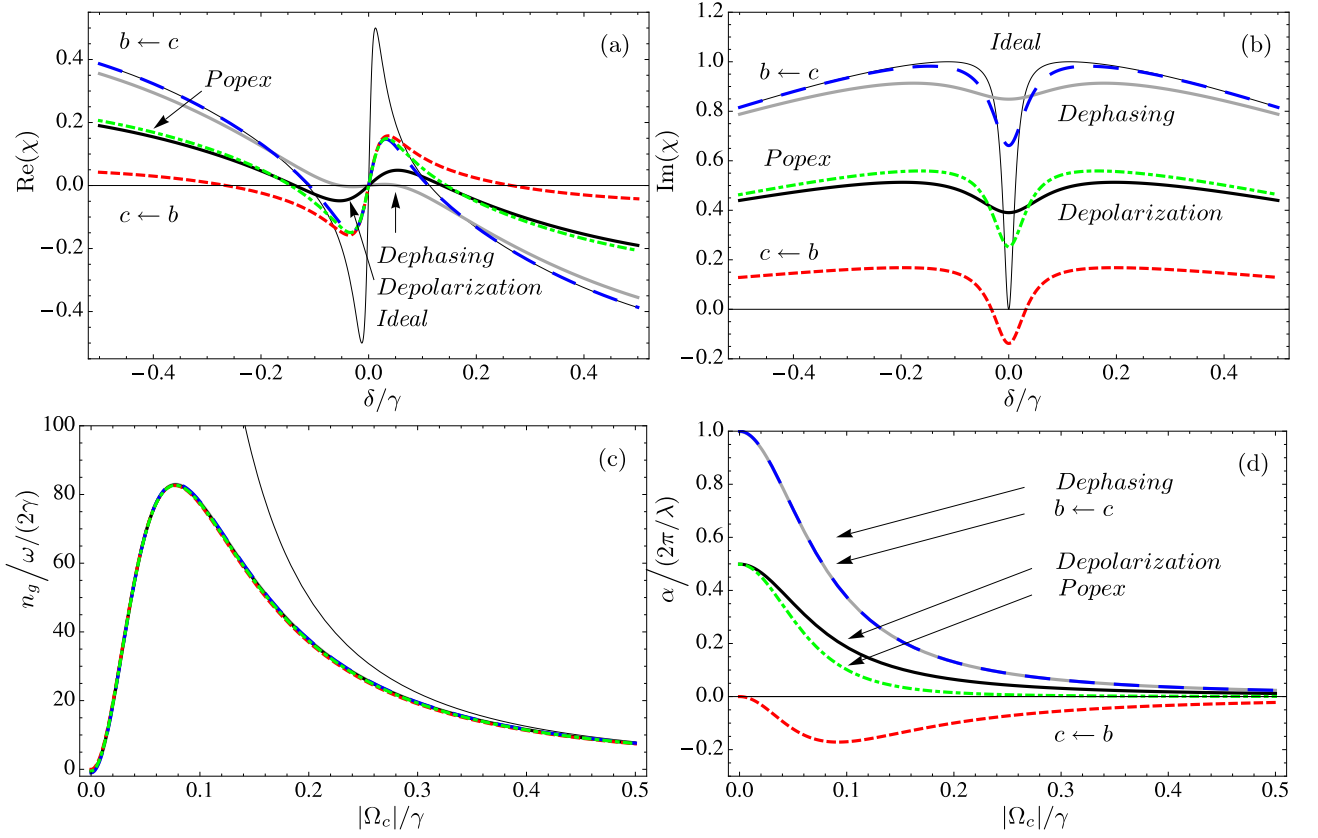


FIG. 2: (Color online) In (a) and (b) we show the real and imaginary part of the susceptibility. In (c) and (d) the slow-down factor (group index)  $n_g$  and absorption  $\alpha$  at a given wave length  $\lambda$ , on two-photon resonance are shown as a function of the control field  $|\Omega_c|$ . The thin black line shows the case of no open system interaction on  $V_{bc}$ . The thick gray line shows the dephasing channel and the thick black line shows the depolarization channel. The remaining lines describe three versions of the amplitude damping channel, the wide-dashed (blue) line shows  $b \leftarrow c$  damping channel, the dashed (red) line shows  $c \leftarrow b$  damping channel and the dash-dotted (green) line shows the incoherent sum of the two damping channels with equal rate. In all plots the proportionality factor  $\kappa$  defined below Eq. (37) is scaled to 1. In (a) and (b) the numerical values are  $|\Omega_c| = 0.16$ ,  $\gamma = 1$ ,  $\Delta = 0$ , and all non-zero channel rates are set equal to 0.1. In (c) and (d) the channel rates are normalized so that the slow-down factors are matched.

in the limit of a small probe field, since in this case  $\rho_{ab}$  is linearly dependent on  $\Omega_b$ . Furthermore, we recall that the real part of the susceptibility is related to the phase evolution of the optical field, while the imaginary part describes the absorption or gain of the field.

The open system channels defined by the Lindblad vectors in Eqs. (22), (25), and (27), change the properties of the  $\Lambda$ -system in a nontrivial way. The susceptibility in the general case can be calculated from Eq. (36) and we find

$$\chi = i\kappa \frac{|\Omega_c|^2 \left[ 2\Gamma^* \text{Re}(\gamma_c)(\gamma + 2\eta_-) + \gamma\gamma_c^*(2\eta_- - \eta_+) \right] + \gamma(2\eta_- + \eta_+)\Gamma^*|\gamma_c|^2}{(|\Omega_c|^2 + \Gamma^*\gamma_b^*) \left[ |\Omega_c|^2 \text{Re}(\gamma_c)(2\gamma - 2\eta_- + 3\eta_+) + 2\gamma\eta_+|\gamma_c|^2 \right]}, \quad (38)$$

where the parameters are defined in Eq. (31). This is a general expression for the susceptibility when the medium interacts with a Markovian environment through the open system channels. A general observation is that this expression does not depend on the optical phases even though the dark state does.

Below, the susceptibility due to the different open system channels are studied one by one. Analytical expressions are retrieved from Eq. (38) as special cases by setting all channel rates except one to zero. To facilitate easier evaluation of the characteristics of the susceptibility due to the different open system channels we plot the corresponding quantities in Figs. 2(a) and 2(b) using the same channel rate for all open system channels. Since the susceptibility is a complex function, the real and imaginary parts, are plotted separately.



If we put all channel rates to zero except  $\eta_z$  we find the susceptibility due to dephasing. Accordingly

$$\chi_{\text{dephase}} = -\kappa \frac{(\delta + i\eta_z)}{(\delta + i\eta_z) \left[ (\delta + \Delta) + i(\gamma + \eta_z/2) \right] - |\Omega_c|^2/2}. \quad (39)$$

This expression for the susceptibility is frequently encountered in the literature, e.g., Ref. [26].

If we instead put  $2\eta_- = \eta_+ = \eta_{bc} \neq 0$  we find the susceptibility of a medium that effectively changes the population within the subspace  $V_{bc}$  and is symbolized accordingly:  $b \leftarrow c$ . We have,

$$\chi_{b \leftarrow c} = -\kappa \frac{(\delta + i\eta_{bc}/4)}{(\delta + i\eta_{bc}/4)(\delta + \Delta + i\gamma) - |\Omega_c|^2/2}. \quad (40)$$

This expression for the susceptibility is also frequently encountered in the literature, e.g., [27]. It is interesting to note the similarity of this expression with Eq. (39), although the open system channels are quite different. Nevertheless, in Figs. 2(a) and 2(b) it can be seen that the phase response of  $\chi_{b \leftarrow c}$  is larger than for  $\chi_{\text{dephase}}$ . This means that a medium affected by pure dephasing cannot slow down light as efficiently as compared to a medium affected by the  $b \leftarrow c$  channel, assuming that the channel rates are equal.

We now consider the amplitude damping channel in the other direction,  $c \leftarrow b$ . The analytical expression of the susceptibility is given by

$$\chi_{c \leftarrow b} = \kappa \frac{2 \left\{ \gamma(4i\delta + \eta_{cb}) + \eta_{cb} \left[ \eta_{cb} - 2i(\delta + \Delta) \right] \right\} |\Omega_c|^2}{\left\{ (\eta_{cb} - 4i\delta) \left[ 2i\gamma + 2(\delta + \Delta) + i\eta_{cb} \right] + 4i|\Omega_c|^2 \right\} \left\{ \left[ \gamma^2 + (\delta - \Delta)^2 \right] \eta_{cb} + (\gamma + 2\eta_{cb}) |\Omega_c|^2 \right\}}. \quad (41)$$

This channel shows a different behavior compared to all other considered channels, it shows gain where the other channels show absorption. That is, a slowly propagating light pulse will be amplified provided that the open system channel  $c \leftarrow b$  can be established.

Let us now consider the channel that is defined by  $\eta_{pe} = \eta_{bc} = \eta_{cb}$ , i.e., the amplitude damping channels in both directions. This open system channel may be important in experimental situations where, e.g., atoms collide and the populations of the states undergo sudden incoherent exchange. We denote this as the population exchange channel, ‘popex’ for short, and the susceptibility  $\chi_{\text{popex}}$ . Hence,

$$\chi_{\text{popex}} = \kappa \frac{-\gamma\eta_{pe}(2\delta + i\eta_{pe}) \left[ 4(\delta - \Delta)^2 + (2\gamma + \eta_{pe})^2 \right] + 4\gamma \left[ -2\gamma\delta + (-2\delta + \Delta)\eta_{pe} \right] |\Omega_c|^2}{\left\{ (2\delta + i\eta_{pe}) \left[ 2i\gamma + 2(\delta + \Delta) + i\eta_{pe} \right] - 2|\Omega_c|^2 \right\} \left\{ \gamma\eta_{pe} \left[ 4(\delta - \Delta)^2 + (2\gamma + \eta_{pe})^2 \right] + (2\gamma + \eta_{pe})(\gamma + 3\eta_{pe}) |\Omega_c|^2 \right\}}. \quad (42)$$

As expected, the absorption profile is located in between the profiles of  $\chi_{b \leftarrow c}$  and  $\chi_{c \leftarrow b}$ , as can be seen in Fig. 2(b). To first order, the absorption profiles of the different amplitude damping channels is shifted by the parameter  $\eta_- = (\eta_{bc} - \eta_{cb})/2$ . However, the phase response, i.e.,  $\text{Re}(\chi_{b \leftarrow c})$  is not affected by this shift, and it is approximately the same for all considered amplitude damping channels.

The susceptibility associated with the isotropic depolarization channel ( $\eta \neq 0$ ) is given by

$$\chi_{\text{depol}} = \kappa \frac{2i\gamma \left\{ \eta(3\delta + 2i\eta) \left[ 4(\delta - \Delta)^2 + (2\gamma + \eta)^2 \right] + 3 \left[ \gamma(6\delta + 2i\eta) + (5\delta - 2\Delta + i\eta)\eta \right] |\Omega_c|^2 \right\}}{\left\{ (3\delta + 2i\eta) \left[ 2\gamma - 2i(\delta + \Delta) + \eta \right] + 3i|\Omega_c|^2 \right\} \left\{ 2\gamma\eta \left[ 4(\delta - \Delta)^2 + (2\gamma + \eta)^2 \right] + 3(2\gamma + \eta)(\gamma + 2\eta) |\Omega_c|^2 \right\}}. \quad (43)$$

In experiments, e.g., where one uses laser beams and hot atomic gases, this open system interaction should be relevant as it corresponds to coherently prepared atoms leaving the laser beam, replaced with atoms in a completely mixed quantum state. The susceptibility is plotted in Fig. (2) and it can be seen that the phase response,  $\text{Re}(\chi_{\text{depol}})$ , is between the corresponding curves for the dephasing and the amplitude damping channels. Furthermore, the absorption curve,  $\text{Im}(\chi_{\text{depol}})$ , is close to the absorption profile of the depolarization channel, but significantly smaller than the corresponding curves for the dephasing and  $b \leftarrow c$  channels. With respect to absorption and phase response, the depolarization channel is therefore not as harmful as the dephasing channel.

When there is no open system interaction on  $V_{bc}$  we retrieve the ideal susceptibility,

$$\chi_{\text{ideal}} = -\kappa \frac{2\delta}{2\delta(\delta + \Delta + i\gamma) - |\Omega_c|^2}, \quad (44)$$

included in Fig. (2) as a reference.

Often one is interested in achieving the slowest possible group velocity in a medium consisting of  $\Lambda$ -systems. Thus, we calculate and present the slow-down factor as a function of the control field, this is plotted in Fig. 2(c). The slow-down factor, or group index, is proportional to the derivative of the real part of the susceptibility,  $n_g \equiv \omega \partial_\delta \text{Re}(\chi) / 2$  at angular frequency  $\omega$ . In Fig. 2(d) we present the absorption on two-photon resonance as a function of the control field, where the absorption coefficient is defined as  $\alpha = (2\pi/\lambda) \text{Im}(\chi)$ . To compare the absorption for a given slow-down factor at  $\delta = \Delta = 0$  we normalize the channel rates. Approximating  $\partial_\delta \chi_k$  for small channel rates in  $V_{bc}$  gives

$$\begin{aligned} \partial_\delta \text{Re}(\chi_{\text{dephasing}}) \big|_{\delta=\Delta=0} &\approx \frac{2\kappa}{4\gamma\eta_z + |\Omega_c|^2}, \\ \partial_\delta \text{Re}(\chi_{b \leftarrow c}) \big|_{\delta=\Delta=0} &\approx \frac{2\kappa}{\gamma\eta_{bc} + |\Omega_c|^2}, \\ \partial_\delta \text{Re}(\chi_{c \leftarrow b}) \big|_{\delta=\Delta=0} &\approx \frac{2\kappa}{\gamma\eta_{cb} + |\Omega_c|^2}, \\ \partial_\delta \text{Re}(\chi_{\text{popex}}) \big|_{\delta=\Delta=0} &\approx \frac{2\kappa}{\gamma\eta_{pe} + |\Omega_c|^2}, \\ \partial_\delta \text{Re}(\chi_{\text{depol}}) \big|_{\delta=\Delta=0} &\approx \frac{2\kappa}{8\gamma\eta/3 + |\Omega_c|^2}, \end{aligned} \tag{45}$$

thus, the normalized rates are  $\eta_z = \eta_{bc}/4 = \eta_{cb}/4 = \eta_{pe}/4 = 2\eta/3$ . In Fig. 2(d) we see that the different open system channels give different absorption profiles, even though the slow-down factors are equal in this regime. Furthermore, it is interesting to note that the dephasing and the  $b \leftarrow c$  amplitude damping channels, with normalized channel rates, have identical absorption characteristics. We see that the isotropic depolarization and population exchange channels are quite similar in Fig. 2(d), but more essential, they have a lower absorption than the dephasing and the  $b \leftarrow c$  amplitude damping channels. As already mentioned, the damping  $c \leftarrow b$  is special in that it yields a gain where the other channels yield absorption of the probe field.

#### IV. CONCLUSIONS

We analyze a three-level  $\Lambda$ -system interacting with a Markovian environment. The Lindblad master equation is reformulated using the Gell-Mann matrices as a basis. We show that we can rewrite this in a convenient vector formalism that is independent of the specific matrix representation of the  $\text{SU}(3)$  generators. An evolution matrix corresponding to this vector form is worked out in detail and the dynamics is written as an inhomogeneous matrix differential equation. The general solution of this equation can be given in terms of the Jordan normal form. The Jordan blocks of the evolution matrix are one-dimensional and the real part of the spectrum is negative. From this follows that the asymptotic solution in all cases we are interested in are independent of the initial states and given by the inverse of the evolution matrix multiplied by a vector that is given by the open system interaction.

The linear optical response of a quantum system is given by the asymptotic steady state solution of the evolution equation. Assuming a weak probe field and a strong control field, i.e., the familiar settings of electromagnetically induced transparency (EIT), we find an explicit and closed form for the susceptibility for general open system dynamics, including pure dephasing, depolarization, and three different forms of amplitude damping channels acting on the subspace of the ground states of the  $\Lambda$ -system.

The open system effects introduce a non-trivial behavior of the linear optical response of the  $\Lambda$ -system. For example, we show that the isotropic depolarization channel is less detrimental to the induced transparency and the corresponding slow-down effect, than is pure dephasing. Furthermore, an amplitude damping channel can lead to reduced absorption and even gain for the probe field.

It is important to know how and why the coherence vector is changing in direction and length, not only in areas of quantum information and computation, but also in high precision spectroscopy, metrology and photonics. The results of this paper shows the usefulness of the coherence vector formalism for experimental and theoretical studies of light-matter coherence phenomena.

## Acknowledgments

M.E., E.S., and L.M.A. acknowledge the Swedish Research Council for financial support.

- 
- [1] M. Fleischhauer, A. Imamoglu, and J. P. Marangos, *Rev. Mod. Phys.* **77**, 633 (2005).
  - [2] J. P. Marangos, *J. Mod. Opt.* **45**, 471 (1998).
  - [3] L. V. Hau, S. E. Harris, Z. Dutton, and C. H. Behroozi, *Nature* **397**, 594 (1999).
  - [4] J. J. Longdell, E. Fraval, M. J. Sellars, and N. B. Manson, *Phys. Rev. Lett.* **95**, 063601 (2005).
  - [5] M. Fleischhauer, S. F. Yelin, and M. D. Lukin, *Opt. Commun.* **179**, 395 (2000).
  - [6] M. Fleischhauer and M. D. Lukin, *Phys. Rev. A* **65**, 022314 (2002).
  - [7] A. Krishna, K. Pandey, A. Wasan, and V. Natarajan, *Europhys. Lett.* **72**, 221 (2005).
  - [8] G. Katsoprinakis, D. Petrosyan, and I. K. Kominis, *Phys. Rev. Lett.* **97**, 230801 (2006).
  - [9] S. Knappe, V. Shah, P. D. D. Schwindt, L. Hollberg, J. Kitching, L. A. Liew, and J. Moreland, *Appl. Phys. Lett.* **85**, 1460 (2004).
  - [10] J. Vanier, *Appl. Phys. B* **81**, 421 (2005).
  - [11] E. Arimondo, *Progr. Optic.* **35**, 257 (1996).
  - [12] L. Viola and S. Lloyd, *Phys. Rev. A* **58**, 2733 (1998).
  - [13] J. Tidström, P. Jänes, and L. M. Andersson, *Phys. Rev. A* **75**, 053803 (2007).
  - [14] Z. Dutton, M. Bashkansky, M. Steiner, and J. Reintjes, *Opt. Express* **14**, 4978 (2006).
  - [15] G. Lindblad, *Commun. Math. Phys.* **48**, 119 (1976).
  - [16] V. Gorini, A. Kossakowski, and E. C. G. Sudarshan, *J. Math. Phys.* **17**, 821 (1976).
  - [17] K. Lendi, *J. Phys. A* **20**, 15 (1987).
  - [18] K. Lendi, *Lecture Notes in Physics*, vol. 717 (Springer Berlin / Heidelberg, 2007).
  - [19] A. J. Macfarlane, A. Sudbery, and P. H. Weisz, *Commun. Math. Phys.* **11**, 77 (1968).
  - [20] Arvind, K. S. Malleš, and N. Mukunda, *J. Phys. A* **30**, 2417 (1997).
  - [21] Adding a term  $g_0 \hat{1}$  to  $\hat{\gamma}_k$  yields the change  $\mathcal{L}(\rho) \rightarrow \mathcal{L}(\rho) - i[\text{Im}(g_0 g_k^*) \cdot \lambda, \rho]$ , which corresponds to the effective change  $H \rightarrow H + \hbar \text{Im}(g_0 g_k^*) \cdot \lambda$  in the Hamiltonian.
  - [22] D. A. Lidar and S. Schneider, *Quant. Info. and. Communcation.* **5**, 350 (2005).
  - [23] If  $M$  is non-invertible, one may resort to the Moore-Penrose pseudo-inverse, see, e.g., [28].
  - [24] M. A. Nielsen and I. L. Chuang, *Quantum computation and quantum information* (Cambridge University Press, 2000).
  - [25] R. W. Boyd, *Nonlinear optics* (Academic Press, 2003).
  - [26] M. O. Scully and M. S. Zubairy, *Quantum optics* (Cambridge University Press, 1997).
  - [27] J. Gea-Banacloche, Y. Q. Li, S. Z. Jin, and M. Xiao, *Phys. Rev. A* **51**, 576 (1995).
  - [28] P. Lancaster and M. Tismenetsky, *The theory of matrices: with applications* (Academic press, San Diego, 1985).